





80300

Code	Nominal lm/m	Real lm/m	W/1m	CCT	CRI	cut mm
80300/90/2700K	2850	1960	14	2700K	>90	29.4
80300/90/C	2850	1960	14	3000K	>90	29.4
80300/90/N	3140	2159	14	4000K	>90	29.4

2 YEARS OF WARRANTY

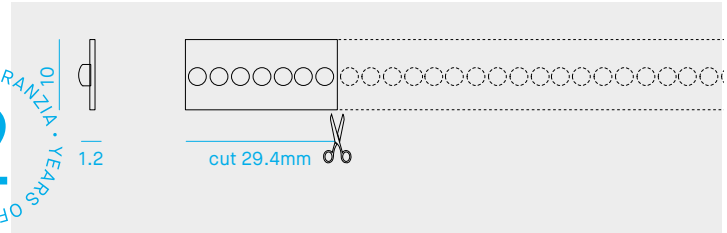

Striscia LED da interno di 5 metri.	LED strip for indoor use of 5m.	Bandeau LED pour l'intérieur de 5 mètres.	LED Lichtband für innen von 5 Meter.
LED 2835, montato su nastro flessibile autoadesivo 3M. 238 LED/m - 1190 LED/5m	2835 LED, assembled on flexible 3M sticky tape. 238 LED/m - 1190 LEDs/5m	LED 2835, réalisé sur circuit flexible autocollant 3M. 238 LED/m - 1190 LED/5m	LED 2835, 3M auf einem flexiblen Klebeband. 238 LED/m - 1190 LED/5m
Life time 50.000h	Life time 50.000h	Durée de vie 50.000h	Lebensdauer 50.000h
È possibile tagliare o piegare il nastro ogni 29.4mm Lunghezza massima consentita del nastro è 5 metri.	Possible flexible and cut points every 29.4mm Maximum length allowed for the tape is 5m.	Le bandeau peut être coupé ou plié tous les 29.4mm Longueur maximum pour le circuit flexible 5 mètres.	Alle 29.4mm schneid- oder biegsam. Maximal zulässige Länge des Bandes beträgt 5 Meter.
Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente.	Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.	Profils en aluminium appropriés pour une dissipation adéquate, à commander séparément	Aluminiumprofile geeignet für ausreichende Ableitung, separat zu bestellen
Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.	In case more LED strips have to be connected to one power supply, connect them in parallel.	Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation	Mehrere LED-Lichtbänder sollten parallelgeschaltet werden

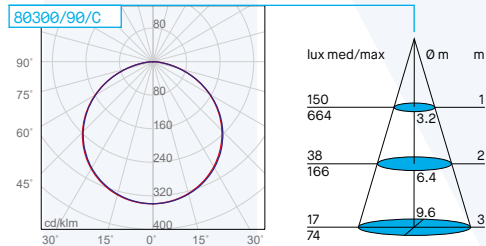

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code	IP20	W	max m	Code	IP20	W	max m	Code	IP67	W	max m	Code	IP67	W	max m
5855		20	1.0	5801 (PUSH/DIM1-10V)		100	6.0	5788		25	1.5	5784		100	6.0
5674		70	4.0	5802/T (PUSH/DALI)		100	6.0	5789		40	2.5	5672		150	9.0
5678		75	4.5					5782		60	3.5	5676		150	9.0
5677		120	7.0					5673		70	4.0	5785		240	14.0
5675		150	9.0					5783		75	4.5	5786		320	19.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secouru disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah

Unità di gestione da ordinare separatamente - Control units to be ordered separately

Code	Descrizione	Description
5856	Dimmer PWM PUSH/DIM 0/1-10V	Dimmer PWM PUSH/DIM/1-10V
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
186155/DIMMER	Dimmer 1-10V monocolor	Dimmer 1-10V mono-colour
5854	Dimmer DALI monocolor	DALI mono-color dimmer
5950/TW	Centralina di controllo Tunable White e Dimming	Tunable White and Dimming control unit
5951/C	Telecomando a 4 zone per centralina 5950/TW	Remote controller 4 zones for 5950/TW control unit
5952/T	Pannello Touch da parete a 4 zone per centralina 5950/TW	Wall touch panel 4 zones for 5950/TW control unit

Per ulteriori unità di gestione, vedi catalogo Lineare - For further control units, see Linear catalogue

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente
Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.

2m da superficie, parete e plafone - wall and ceiling surface-mounted of 2m

Code	Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/3		BARRA/STRIP/3/S	BARRA/STRIP/3/A
BARRA/STRIP/3E		BARRA/STRIP/3E/S	BARRA/STRIP/3E/A
BARRA/STRIP/7		Lens	Lens
BARRA/STRIP/10		BARRA/STRIP/10/S	BARRA/STRIP/10/A
BARRA/STRIP/14		Lens	Lens
BARRA/STRIP/19		BARRA/STRIP/19/S	BARRA/STRIP/19/A

Code	Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
PA/01		PA/01/S	--
--		PA/02/S	--
PA/03		PA/03/S	--
PA/04		PA/04/S	--
PA/06		PA/06/S	--

2m da incasso - recessed-mounted 2m

Code	Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/4		BARRA/STRIP/4/S	BARRA/STRIP/4/A
BARRA/STRIP/5		BARRA/STRIP/5/S	BARRA/STRIP/5/A
BARRA/STRIP/9		BARRA/STRIP/9/S	BARRA/STRIP/9/A
BARRA/STRIP/15		BARRA/STRIP/15/S	--

Code	Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/16		BARRA/STRIP/16/S	BARRA/STRIP/16/A
BARRA/STRIP/17		BARRA/STRIP/17/S	BARRA/STRIP/17/A
PA/05		PA/05/S	--
PA/07		PA/07/S	--

2m angolare - angled 2m

Code	Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/6		BARRA/STRIP/6/S	BARRA/STRIP/6/A
BARRA/STRIP/8		BARRA/STRIP/8/S	BARRA/STRIP/8/A
BARRA/STRIP/11		BARRA/STRIP/11/S	BARRA/STRIP/11/A

Code	Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/12		BARRA/STRIP/12/S	BARRA/STRIP/12/A
BARRA/STRIP/22		BARRA/STRIP/22/S	BARRA/STRIP/22/A