


80321/RGB

Code	Nominal lm/m	Real lm/m	W/1m	CCT	CRI	cut mm
80321/RGB	990	550	14	--	--	71

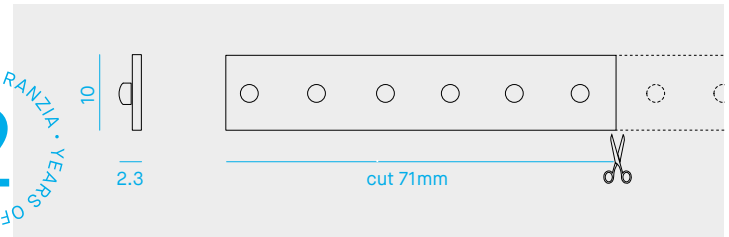

Striscia LED RGB da interno di 5 metri.

RGB LED strip for indoor use of 5m.

Bandeau LED RGB pour l'intérieur de 5 mètres.

RGB LED Lichtband für innen von 5 Meter.

LED 5050, montato su nastro flessibile autoadesivo 3M. 84 LED/m - 420 LED/5m

5050 LED, assembled on flexible 3M sticky tape. 84 LED/m - 420 LEDs/5m

LED 5050, réalisé sur circuit flexible autocollant 3M. 84 LED/m - 420 LED/5m

LED 5050, 3M auf einem flexiblen Klebeband. 84 LED/m - 420 LED/5m

Life time 50.000h

Life time 50.000h

Durée de vie 50.000h

Lebensdauer 50.000h

È possibile tagliare o piegare il nastro ogni 71mm
Lunghezza massima consentita del nastro è 5 metri.

Possible flexible and cut points every 71mm
Maximum length allowed for the tape is 5m.

Le bandeau peut être coupé ou plié tous les 71mm
Longueur maximum pour le circuit flexible 5 mètres.

Alle 71mm schneid- oder biegsbar.
Maximal zulässige Länge des Bandes beträgt 5 Meter.

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente.

Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.

Profils en aluminium appropriés pour une dissipation adéquate, à commander séparément

Aluminiumprofile geeignet für ausreichende Ableitung, separat zu bestellen

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.

In case more LED strips have to be connected to one power supply, connect them in parallel.

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code IP20	W	max m	Code IP20	W	max m	Code IP67	W	max m	Code IP67	W	max m
5855	20	1.0	5801 (PUSH/DIM1-10V)	100	6.0	5788	25	1.5	5784	100	6.0
5674	70	4.0				5789	40	2.5	5672	150	9.0
5678	75	4.5				5782	60	3.5	5676	150	9.0
5677	120	7.0				5673	70	4.0	5785	240	14.0
5675	150	9.0				5783	75	4.5	5786	320	19.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Unità di gestione da ordinare separatamente – Control units to be ordered separately

Code	Descrizione	Description
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
5920/RGB	Centralina RGB con telecomando	RGB Control unit with remote controller
5940/U	Centralina RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming control unit
5941/C	Telecomando a 4 zone per centralina 5940/U	Remote controller 4 zones for 5940/U control unit
5942/T	Pannello touch da parete a 4 zone per centralina 5940/U	Wall touch panel 4 zones for 5940/U control unit

Per ulteriori unità di gestione, vedi catalogo Lineare - For further control units, see Linear catalogue

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente
Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.

2m da superficie, parete e plafone - wall and ceiling surface-mounted of 2m

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/3	BARRA/STRIP/3/S	BARRA/STRIP/3/A
BARRA/STRIP/3E	BARRA/STRIP/3E/S	BARRA/STRIP/3E/A
BARRA/STRIP/7	Lens	Lens
BARRA/STRIP/10	BARRA/STRIP/10/S	BARRA/STRIP/10/A
BARRA/STRIP/14	Lens	Lens
BARRA/STRIP/19	BARRA/STRIP/19/S	BARRA/STRIP/19/A

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
PA/01	PA/01/S	--
--	PA/02/S	--
PA/03	PA/03/S	--
PA/04	PA/04/S	--
PA/06	PA/06/S	--

2m da incasso - recessed-mounted 2m

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/4	BARRA/STRIP/4/S	BARRA/STRIP/4/A
BARRA/STRIP/5	BARRA/STRIP/5/S	BARRA/STRIP/5/A
BARRA/STRIP/9	BARRA/STRIP/9/S	BARRA/STRIP/9/A
BARRA/STRIP/15	BARRA/STRIP/15/S	--

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/16	BARRA/STRIP/16/S	BARRA/STRIP/16/A
BARRA/STRIP/17	BARRA/STRIP/17/S	BARRA/STRIP/17/A
PA/05	PA/05/S	--
PA/07	PA/07/S	--

2m angolare - angled 2m

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/6	BARRA/STRIP/6/S	BARRA/STRIP/6/A
BARRA/STRIP/8	BARRA/STRIP/8/S	BARRA/STRIP/8/A
BARRA/STRIP/11	BARRA/STRIP/11/S	BARRA/STRIP/11/A

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
BARRA/STRIP/12	BARRA/STRIP/12/S	BARRA/STRIP/12/A
BARRA/STRIP/22	BARRA/STRIP/22/S	BARRA/STRIP/22/A