

PiE AIR SUPER LIGHT 190+ *190 W 18 V BLK/TRNS*



SUPER LIGHT

GLASS-FREE AND FRAMELESS, NEVERTHELESS ROBUST SOLAR MODULE DUE TO ETFE WITH A NET WEIGHT OF 2.90 KG



EASY TO FIT

16 LONG HOLES FOR EASY AND UNIVERSAL USAGE



HIGH PERFORMANCE


USAGE OF SPECIAL MONOCRYSTALLINE SOLAR CELLS TO ABSORB THE MAXIMUM OF SUNLIGHT AND CONVERT INTO ENERGY



WARRANTY

6 YEARS PRODUCT WARRANTY
25 YEARS LINEAR PERFORMANCE WARRANTY (81% POWER ASSURANCE)

Type	PiE AIR SUPER LIGHT 190+
Maximum Power (Pmax)	190W+
Maximum Power Voltage (Vmp)	18.00V
Maximum Power Current (Imp)	10.83A
Open Circuit Voltage (Voc)	21.6V±3%*
Short Circuit Current (Isc)	11.9A±3%*
Power temperature coefficient	- 0.045%/°C
Voltage temperature coefficient	- 0.33%/°C
Current temperature coefficient	- 0.05%/°C
Power Selection	0~5W
Maximum System Voltage	IEC 1500V
Module Efficiency (%)	> 19,1 %
Certification	CE – RoHS – ISO IEC 61730 - IEC61215 - IEC61000

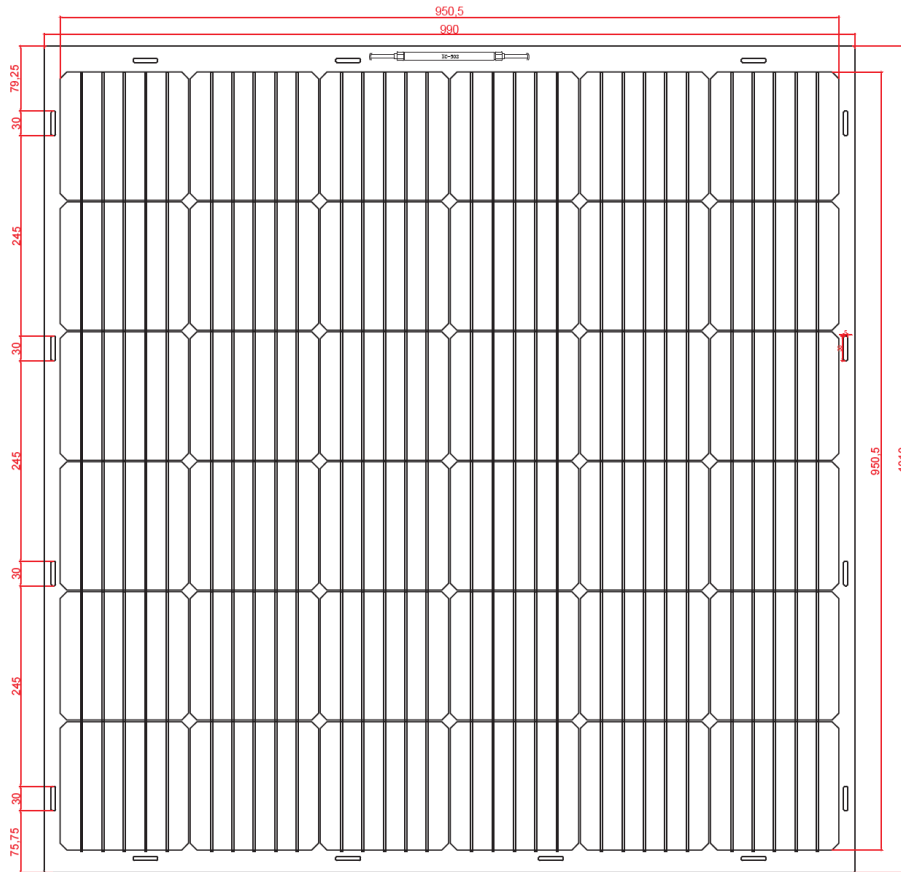

SIZE: 1010 x 990 x 3.5

