


Model	A	B	C	D	E
RCQ 160.15	148	148	5	68	120



Drilling scheme	A	B	Ø C
RCQ 160.15	125×125	131×131	4,5

RCQ 160.15 - 150×150 | 120 m³/h

VENTILATION



- Axial fans supplied with grille and filter;
- Low external profile;
- IP55 or IP54 Protection degree (IP44 on request);
- Maximum operating temperature: +70° C;
- Quick and functional assembly of the fan of the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Possible installation with screws (not provided);

- Body and Grille made of ABS self-extinguishing material grey RAL 7035;
- Ball bearing motor;
- Slotted external grilles to allow drainage of condensation;
- Easily removable grille to allow quick replacement of the filter;
- In accordance with European Standard EN 60529, EN 60335-2-80;
- UL version available.

TECHNICAL DATA

Model intake	Code	Model extraction	Code	IP Grade	Voltage (V)	Frequency (Hz)	Colour grille	Flow rate (m ³ /h) with filter	Flow rate (m ³ /h) without filter	Power (W)	Nom. Curr. (A)	Noisiness dB(A) _{1m}	Weight Kg
RCQ 160.15	0100335	RCQ 160.15 E	0101635	IP54	12	-	GREY RAL 7035	55	120	5	0,4	37	0,5
RCQ 160.15	0100435	RCQ 160.15 E	0101735	IP54	24	-	GREY RAL 7035	55	120	5	0,2	37	0,5
RCQ 160.15	0105335	RCQ 160.15 E	0105535	IP54	12	50/60	GREY RAL 7035	60	110	17	2	40	0,75
RCQ 160.15	0104335	RCQ 160.15 E	0104435	IP54	24	50/60	GREY RAL 7035	60	110	15	1	40	0,75
RCQ 160.15	0105435	RCQ 160.15 E	0105635	IP54	48	50/60	GREY RAL 7035	60	110	16	0,5	40	0,75
RCQ 160.15	0100235	RCQ 160.15 E	0101835	IP54	110-120	50/60	GREY RAL 7035	60	110	20	0,25	40	0,75
RCQ 160.15	0100135	RCQ 160.15 E	0101935	IP54	220-240	50/60	GREY RAL 7035	60	110	20	0,125	40	0,75
RCQ 160.15	0100355	-	-	IP55	12	-	GREY RAL 7035	51	120	5	0,4	37	0,5
RCQ 160.15	0100455	-	-	IP55	24	-	GREY RAL 7035	51	120	5	0,2	37	0,5
RCQ 160.15	0100755	-	-	IP55	12	50/60	GREY RAL 7035	56	110	17	2	40	0,75
RCQ 160.15	0100855	-	-	IP55	24	50/60	GREY RAL 7035	56	110	15	1	40	0,75
RCQ 160.15	0101155	-	-	IP55	48	50/60	GREY RAL 7035	56	110	16	0,5	40	0,75
RCQ 160.15	0100255	-	-	IP55	110-120	50/60	GREY RAL 7035	56	110	20	0,25	40	0,75
RCQ 160.15	0100155	-	-	IP55	220-230	50/60	GREY RAL 7035	56	110	20	0,125	40	0,75
RCQ 160.15 UL	0200335	RCQ 160.15 E UL	0201635	IP54	12	-	GREY RAL 7035	55	120	5	0,4	37	0,5
RCQ 160.15 UL	0200435	RCQ 160.15 E UL	0201735	IP54	24	-	GREY RAL 7035	55	120	5	0,2	37	0,5
RCQ 160.15 UL	0205335	RCQ 160.15 E UL	0205535	IP54	12	50/60	GREY RAL 7035	60	110	17	2	40	0,75
RCQ 160.15 UL	0204335	RCQ 160.15 E UL	0204435	IP54	24	50/60	GREY RAL 7035	60	110	15	1	40	0,75
RCQ 160.15 UL	0205435	RCQ 160.15 E UL	0205635	IP54	48	50/60	GREY RAL 7035	60	110	16	0,5	40	0,75
RCQ 160.15 UL	0200235	RCQ 160.15 E UL	0201835	IP54	110-120	50/60	GREY RAL 7035	60	110	20	0,25	40	0,75
RCQ 160.15 UL	0200135	RCQ 160.15 E UL	0201935	IP54	220-240	50/60	GREY RAL 7035	60	110	20	0,125	40	0,75
RCQ 160.15 UL	0200355	-	-	IP55	12	-	GREY RAL 7035	51	120	5	0,4	37	0,5
RCQ 160.15 UL	0200455	-	-	IP55	24	-	GREY RAL 7035	51	120	5	0,2	37	0,5
RCQ 160.15 UL	0200755	-	-	IP55	12	50/60	GREY RAL 7035	56	110	17	2	40	0,75
RCQ 160.15 UL	0200855	-	-	IP55	24	50/60	GREY RAL 7035	56	110	15	1	40	0,75
RCQ 160.15 UL	0201155	-	-	IP55	48	50/60	GREY RAL 7035	56	110	16	0,5	40	0,75
RCQ 160.15 UL	0200255	-	-	IP55	110-120	50/60	GREY RAL 7035	56	110	20	0,25	40	0,75
RCQ 160.15 UL	0200155	-	-	IP55	220-240	50/60	GREY RAL 7035	56	110	20	0,125	40	0,75

FLOW CHARTS

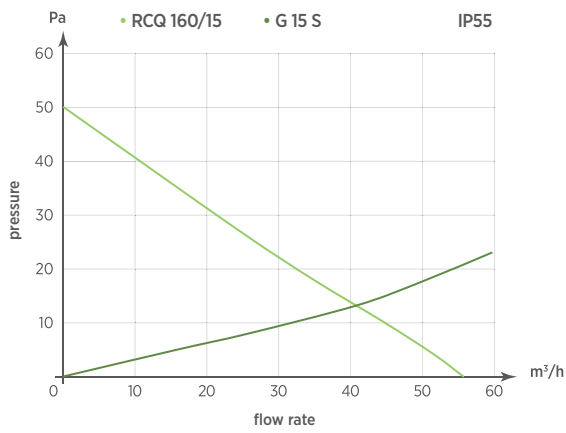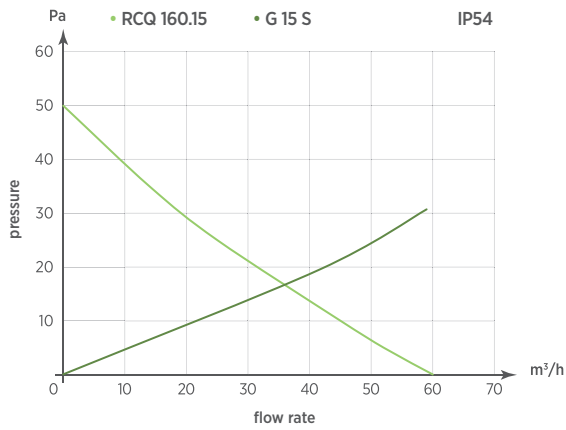

ACCESSORIES:

SEE PAGES 22 AND 44



Grilles



Thermostats



Hygostat