




PLT29

Code	Nominal lumen	W	CCT	Beam
PLT29/3K	3200	30	3000K	120°
PLT29/4K	3200	30	4000K	120°

2 ANNI DI GARANZIA
2 YEARS OF GUARANTEE

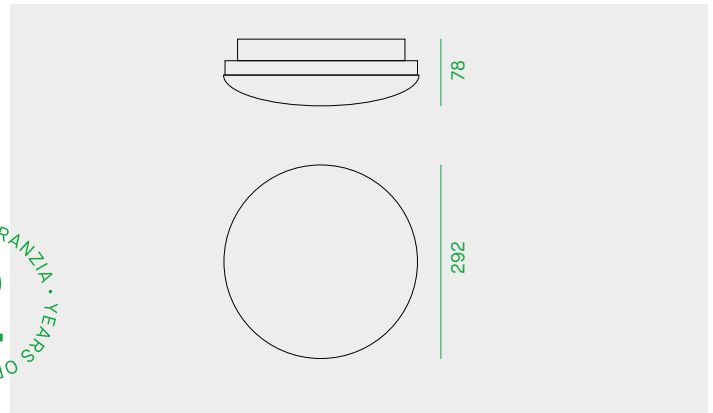

Plafoniera LED per installazione a soffitto o a parete.

LED fitting for ceiling or wall mounted installation.

Plafonnier LED pour installation au plafond ou au mur.

LED Decken- Wandleuchten.

LED HONGLI 2835

2835 HONGLI LED.

LED HONGLI 2835

2835 HONGLI LED.

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in policarbonato colore grigio.

Gray polycarbonate body.

Corps en polycarbonate gris.

Grauer Polykarbonatkörper.

Diffusore in policarbonato opale.

Opal polycarbonate diffuser.

Diffuseur en polycarbonate opale.

Opal-Polykarbonat Diffuser.

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

