





70091

Code	Nominal lumen/m	W/m	CCT	Vdc
70091/C	1750	19,2	3000K	24
70091/N	1950	19,2	4000K	24
70091/F	2140	19,2	5000K	24



Striscia LED da interno di 5 metri.

LED strip for indoor use of 5m.

Bandeau LED pour l'intérieur de 5 mètres.

LED Lichtband für innen von 5 Meter.

LED 3528, montato su nastro flessibile autoadesivo.
240 LED/m (1200 LED totali), 20W/m (100W totali).

3528 LED, assembled on flexible sticky tape.
1200 LEDs, 240 LED/m, 100W, 20W/m.

LED 3528, réalisé sur circuit flexible autocollant.
240 LED/m (1200 LED en total), 20W/m (100W en total).

LED 3528, auf einem flexiblen Klebeband.
240 LED/m (1200 LED insgesamt) 20W/m (100W insgesamt).

Life time 30.000h (rendimento 70%).

Life time 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

È possibile tagliare o piegare il nastro ogni 25mm (6 LED).
Lunghezza massima consentita del nastro è 5 metri.

Possible flexible and cut points every 25mm (6 LEDs).
Maximum length allowed for the tape is 5m.

Le bandeau peut être coupé ou plié tous les 25mm (6 LEDs).
Longueur maximum pour le circuit flexible 5 mètres.

Alle 25mm (6 LED) schneid- oder biegebar.
Maximal zulässige Länge des Bandes beträgt 5 Meter.

Profili in alluminio da ordinare separatamente, (indispensabili per una adeguata dissipazione del calore).

Aluminium profiles to be ordered separately, (essential for a correct heat dissipation).

Profils en aluminium à commander séparément (indispensable pour une dissipation correcte de la chaleur).


Aluminiumprofile separat zu bestellen (wichtig für eine ausreichende Wärmeableitung).

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo

In case more LED strips have to be connected to one power supply, connect them in parallel

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden

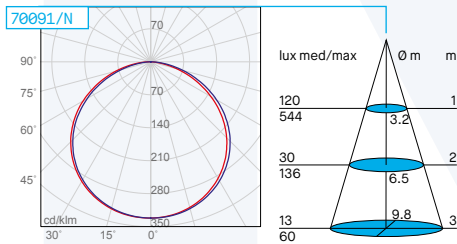

Code	W	Vdc	IP	*max alimentazione m / max supply lenght m
5788	25	24	IP67	2,0
5789	40	24	IP67	3,0
5782	60	24	IP67	5,0
5674	70	24	IP20	6,0
5673	70	24	IP67	6,0
5783	75	24	IP67	6,5
5802/T	100	24	IP20	8,5
5784	100	24	IP67	8,5
5672	150	24	IP67	13,5
5675	150	24	IP20	13,5
5785	240	24	IP67	21,5
5786	320	24	IP67	28,5
5801	100	24	IP20	1-10 V - PUSH (with cod.5802 DALI-PWM)
186155/DIMMER	fino a	up to		11

Alimentatori da ordinare separatamente - Power supplies to be ordered separately -
Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

*
Calcolo eseguito con potenza effettiva di 11W/m

Measurement done with real power of 11W/m

Calcul effectué avec une puissance réelle de 11W/m

Die Berechnung wurde mit der tatsächlichen Leistung von 11W/m durchgeführt

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah