





Equivalent to 2x26W CFL

2 ANNI DI GARANZIA • YEARS OF GUARANTEE

## E26

Code	Nominal lumen	W	CCT	Driver
E26/3K	2300	20	3000K	on-off
E26/4K	2400	20	4000K	on-off

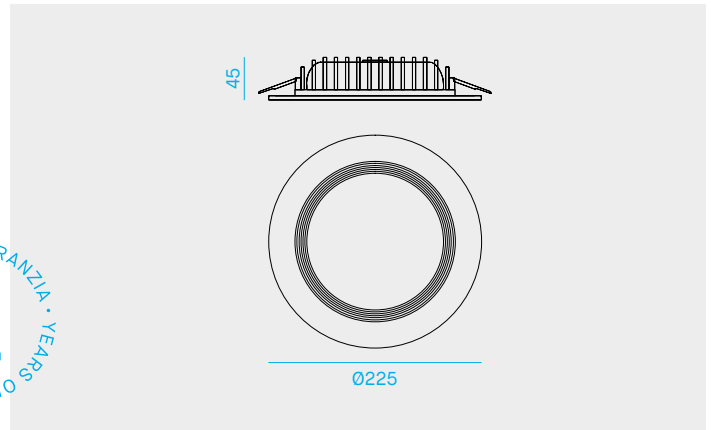

Incasso LED per installazione nel controsoffitto.

Recessed LED fitting for false ceiling installation.

Appareil à encastrer LED pour installation dans faux-plafond.

LED-Einbau für abgehängte Deckeninstallation.

LED HONGLI 2835.

2835 HONGLI LED.

LED HONGLI 2835.

2835 HONGLI LED.

Life time 36.000h (rendimento 70%).

Life time 36.000h (70% lumen maintenance).

Durée de vie 36.000h (rendement 70%).

Lebensdauer 36.000h. (Lichtstrom 70%).

Corpo in alluminio pressofuso.

Body in die-cast aluminium.

Corps en fonderie d'aluminium.

Gehäuse aus Aluminium-Druckguss.

Anello in alluminio verniciato bianco.

Ring in white painted aluminium.

Collerette en aluminium peint blanc.

Ring aus weiss lackiertem Aluminium.

Diffusore opale.

Opal diffuser.

Diffuseur opal.


Opal diffuser.

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V 50/60Hz enthalten.

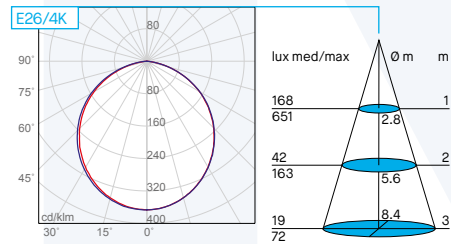

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
E26/___/1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
E26/___/2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
E26/___/3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah